


HGL5-12A

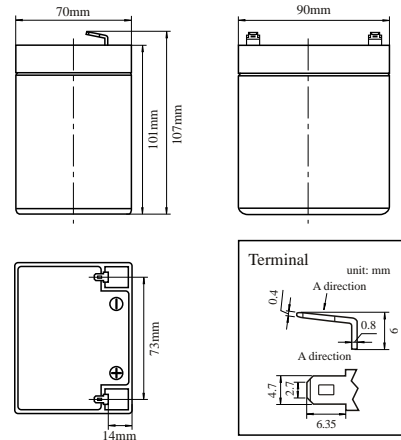

Specifications

Nominal Voltage		12V
Rated Capacity(20 hour rate)		5AH
Dimension	Total Height (with terminals)	107mm(4.21inches)
	Height	101mm(3.98inches)
	Length	90mm(3.54inches)
	Width	70mm(2.76inches)
Weight		Approx.1.83kg(4.03lbs)


Characteristics

Capacity 77°F(25°C)	20 hour rate(250mA)	5AH
	10 hour rate(465mA)	4.65AH
	5 hour rate(850mA)	4.25AH
	1 hour rate(3A)	3AH
	15 min rate(8.76A)	2.19AH
Internal Resistance	Full charged Battery 77°F(25°C)	33mΩ
Capacity affected by Temperature (20 hour rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
Self-Discharge 77°F(25°C)	5°F(-15°C)	65%
	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
Max. Discharge Current 77°F(25°C)	Capacity after 12 month storage	64%
	75A(5S)	
Terminal	Standard	F1
	Optional	F2
Charging (Constant Voltage)	Cycle	Initial Charging Current 1A Or Small 14.5V~14.9V/77°F(25°C)
	Float	13.6V~13.8V/77°F(25°C)


Constant Power Discharge Watts Per Cell @ 77°F(25°C)

Cut off voltageV/cell	5M	10M	15M	30M	40M	60M
1.50	39.1	26.4	20.1	12.3	9.9	7.1
1.60	38.0	25.6	19.5	12.0	9.5	6.9
1.67	37.3	25.1	19.1	11.8	9.4	6.8
1.70	36.8	24.8	18.8	11.5	9.3	6.6
1.75	36.0	24.3	18.5	11.4	9.0	6.5

Discharge characteristics 77°F(25°C)

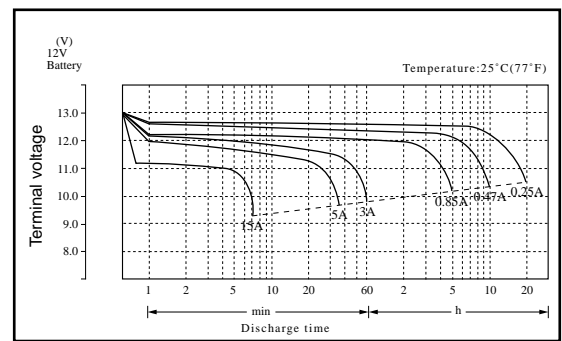

Duration of discharge vs. Discharge current

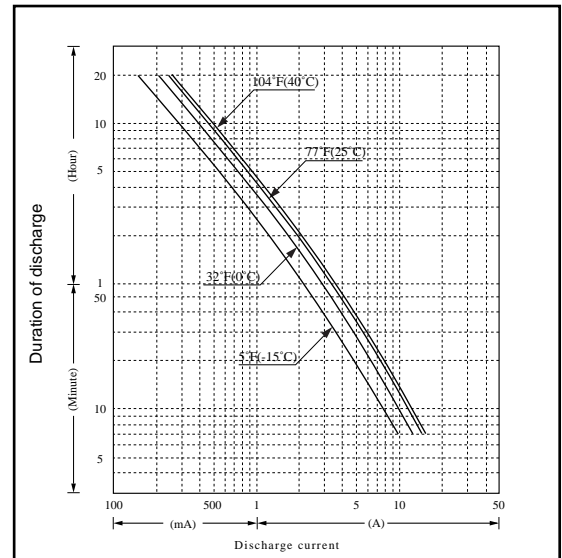

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values.