

Five Key Features

- 1 Guaranteed quality: 5 year product warranty, 25 year performance warranty *
- 2 Predictable output: Tight power tolerance of $\pm 3\%$
- 3 Innovative solutions: Anti-reflecting coating for high sunlight absorption
- 4 Robust design: Module certified to withstand high snow loads, up to 5.4 kN/m^2 **
- 5 Long term responsibility: Free module recycling in PV Cycle member countries

*Please refer to Hanwha SolarOne Product Warranty for details.
 **Please refer to Hanwha SolarOne module Installation Guide.

Quality and Environmental Certificates

- o ISO 9001 quality standards and ISO 14001 environmental standards
- o OHSAS 18001 occupational health and safety standards
- o IEC 61215 and IEC 61730 Class A certifications
- o Conformity to CE



About Hanwha SolarOne

Hanwha SolarOne is a vertically integrated manufacturer of photovoltaic modules designed to meet the needs of the global energy consumer.

- o High reliability, guaranteed quality, and excellent cost-efficiency due to vertically integrated production and control of the supply chain;
- o Optimization of product performance and manufacturing processes through a strong commitment to research and development;
- o Global presence throughout Europe, North America, and Asia, offering regional technical and sales support.



Electrical Characteristics

SF160 Mono

Electrical Characteristics at Standard Test Conditions (STC)

Power Class	170W	175W	180W	185W	190W	195W
Maximum Power (P_{max})	170W	175W	180W	185W	190W	195W
Open Circuit Voltage (V_{oc})	43.8V	44.0V	44.3V	44.6V	44.8V	45.0V
Short Circuit Current (I_{sc})	5.36A	5.48A	5.59A	5.68A	5.78A	5.85A
Voltage at Maximum Power (V_{mpp})	35.0V	35.2V	35.4V	35.6V	35.8V	36.0V
Current at Maximum Power (I_{mpp})	4.86A	4.98A	5.11A	5.21A	5.33A	5.42A
Module Efficiency	13.3%	13.7%	14.1%	14.5%	14.9%	15.3%

P_{max} , V_{oc} , I_{sc} , V_{mpp} , and I_{mpp} tested at STC defined as irradiance of 1000W/m² at AM 1.5 solar spectrum and temperature 25 ±2°C. Power tolerance of ±3% refers to measured performance.


Electrical Characteristics at Normal Operating Cell Temperature (NOCT)

Power Class	170W	175W	180W	185W	190W	195W
Maximum Power (P_{max})	122W	126W	130W	133W	137W	140W
Open Circuit Voltage (V_{oc})	40.3V	40.5V	40.8V	41.0V	41.2V	41.4V
Short Circuit Current (I_{sc})	4.34A	4.44A	4.53A	4.60A	4.68A	4.74A
Voltage at Maximum Power (V_{mpp})	31.5V	31.7V	31.9V	32.0V	32.2V	32.4V
Current at Maximum Power (I_{mpp})	3.89A	3.98A	4.09A	4.17A	4.26A	4.34A
Module Efficiency	11.9%	12.3%	12.7%	13.0%	13.4%	13.7%

P_{max} , V_{oc} , I_{sc} , V_{mpp} , and I_{mpp} tested at NOCT defined as irradiance of 800W/m²; wind speed 1m/s. Power tolerance of ±3% refers to measured performance.

Performance at Low Irradiance:

The typical relative change in module efficiency at an irradiance of 200W/m² in relation to 1000W/m² (both at 25°C and AM 1.5 spectrum) is less than 5%.

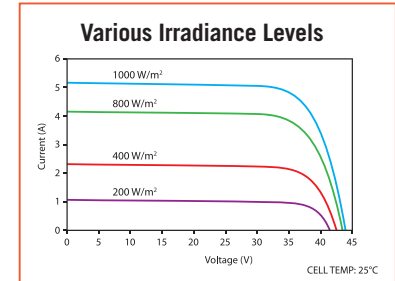

Temperature Characteristics


Normal Operating Cell Temperature (NOCT)	45°C ±3°C
Temperature Coefficients of P	-0.44%/°C
Temperature Coefficients of V	-0.33%/°C
Temperature Coefficients of I	+0.03%/°C

Maximum Ratings

Maximum System Voltage	1000V (IEC); 600V (UL)
Series Fuse Rating	10A
Maximum Reverse Current	Series fuse rating multiplied by 1.35

Mechanical Characteristics

Dimensions	1580mm x 808mm x 40mm (62.2 in x 31.8 in x 1.57 in)
Weight	14kg (30.8 lbs)
Frame	Aluminum alloy
Front	Tempered glass
Encapsulant	EVA
Back cover	Composite sheet
Cell Technology	Monocrystalline
Cell Size	125mm x 125mm (4.92 in x 4.92 in); small chamfer angle
Number of Cells (Pieces)	72 (6 x 12)
Junction Box	Protection class IP65 with bypass-diode
Output Cables	Solar cable: 4mm ² ; length 900mm (35.4 in)
Connector	Linyang LY0706-2

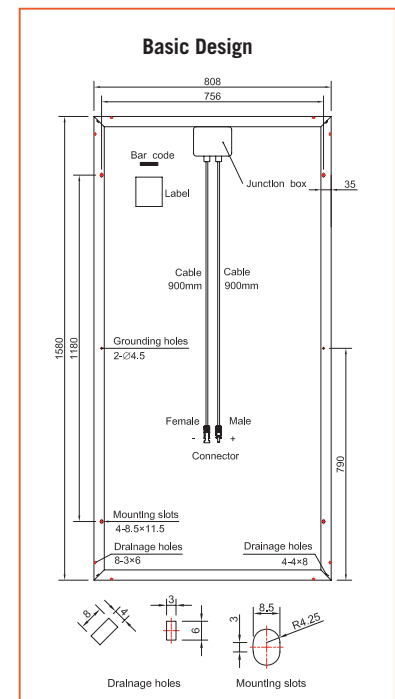

System Design

Operating Temperature	-40°C to 85°C
Hail Safety Impact Velocity	25mm at 23m/s
Fire Safety Classification (IEC 61730)	Class C
Static Load Wind/Snow	2400Pa /5400Pa

Packaging and Storage

Storage Temperature	-40°C to 85°C
Packaging Configuration	24 pieces per pallet
Loading Capacity (40 ft. HQ Container)	672 pieces

©Hanwha SolarOne Co. Ltd. Specifications are subject to change without notice, Release: 2011-03-17